




Inserting the SIM Card & Battery

The E5577 is a mobile 3/4G MiFi (meaning 'My WiFi') device which connects to the cellular network and provides a WiFi connection inside your vehicle for up to 10 devices to connect to.

Any full size mobile broadband SIM card from a UK or EU operator can be used in the device. A 'zero credit' Three SIM card has been supplied to allow you to get up and running straight away, but you may find a pre-loaded or contract SIM card better value.

Start by inserting the SIM card into the MiFi. The back of the device can be removed to reveal two slots, the larger of which is the SIM card slot. Insert the SIM card face down with the cut corner in the same position as on the marking. Once the SIM has been inserted under the retaining bar, insert the battery and replace the back cover.



Powering On The Device & Connecting to the WiFi Network

You can now power on the device by pressing and holding the power button on the front for 2-3 seconds until the Huawei logo is displayed. The device is now turned on and will attempt to connect to a Mobile Network.

On the display is the name of your WiFi network starting with **Huawei-XXXX** and under this is your unique wireless passkey. You connect to the device in the same way you would connect to a new wireless network, entering the passkey when prompted. Nobody will be able to join this network unless you provide them with this key.

Connecting to the Roof Aerial via the Quick Mount



Located in a locker in your vehicle is your 4G Quick Mount on which to attach, connect, power and store your MiFi device.


To connect to the Quick Mount, first locate the antenna connections on the MiFi device – these can be found under a flap to the right of the USB charging socket (see diagram bottom right). Open the flap to reveal two small brass TS9 connections.

On the quick mount you will see two corresponding cables on the right hand side of the mount with a silver push fit TS9 connection. There is no right or wrong way around to connect the antenna cables, simply push on into each of the antenna connections.

Once these have been successfully connected, you can now connect the USB charging cable. This cable can only be inserted one way, so to be sure to rotate it 180 degrees if you feel it is met with resistance in the socket.

Finally, you can now offer the MiFi device onto the rubber mounting plate onto the quick mount as seen in the image above. There is a switch with an LED indicator on the bottom left of the mount to allow you to turn the charging facility on/off. You can leave this powered on all the time, as once the device is fully charged the power draw will be minimal with the device turned on, or you can turn it on/off as you wish.

Once the internal battery is fully charged, the MiFi device will run from your leisure battery. Should you wish to remove the MiFi device from your van and use as a portable device, the battery will be fully charged.

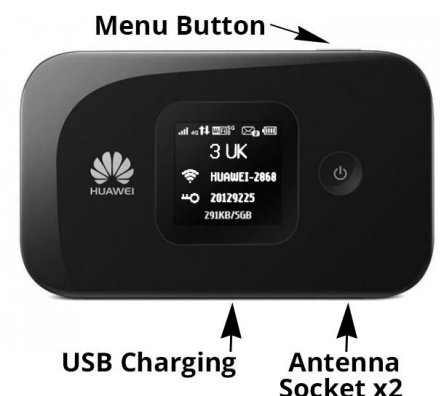

Understanding the On-Screen Display



Once connected, take note of the information displayed on the screen. The top left hand corner shows the signal strength, ideally this needs to show 3G or 4G. A 2G connection will be very slow.

The name of the network is displayed next to the WiFi symbol and the password is displayed next to the key symbol and is made up of 8 numbers which are unique to every device.

Roaming & Using Your Device Abroad

To use this device abroad, you will need to enable roaming. Roaming does not necessarily mean that you will be charged any more just that you can use a SIM card in a country other than the one in which it is registered.

The easiest way to do this is using the menu on the device itself. **1.)** Power on the device. **2.)** Once the device has started up, press the **MENU** button on the top **seven times** until the **DATA ROAMING** option is highlighted. **3.)** Press the **POWER** button on the front of the device until a tick is now displayed in the box. Data roaming is now enabled.

You may see while completing the above a **WiFi Extender Mode**. Enabling this mode stops the 3/4G connection, so keep this disabled. If you struggle to get online, check it hasn't been enabled by accident. It doesn't really extend a WiFi source since there is no external antenna connection for WiFi.


Advanced Usage of the Device

The E5577 has many features, not all of them we are able to provide support on. We'd advise not to change any settings or passwords. There is a RESET button under the battery cover if you find that a change you have made prevents the device from working as intended.



There are two ways you can access additional settings on the device. The easiest is using the **Huawei HiLink App**. You can download this for free from the Apple App Store or the Google Play Store, search for 'Huawei' and the icon on the left and download the free App. The App will only work when you are connected to your MiFi device via WiFi. Once connected, open the app which will now display information in addition to what can be displayed on its built in screen.

There is a useful data counter which can be reset by tapping on the data counter and choosing **Settings > Clear Statistics History**. This is especially useful when you insert a new SIM Card and which to monitor your usage.

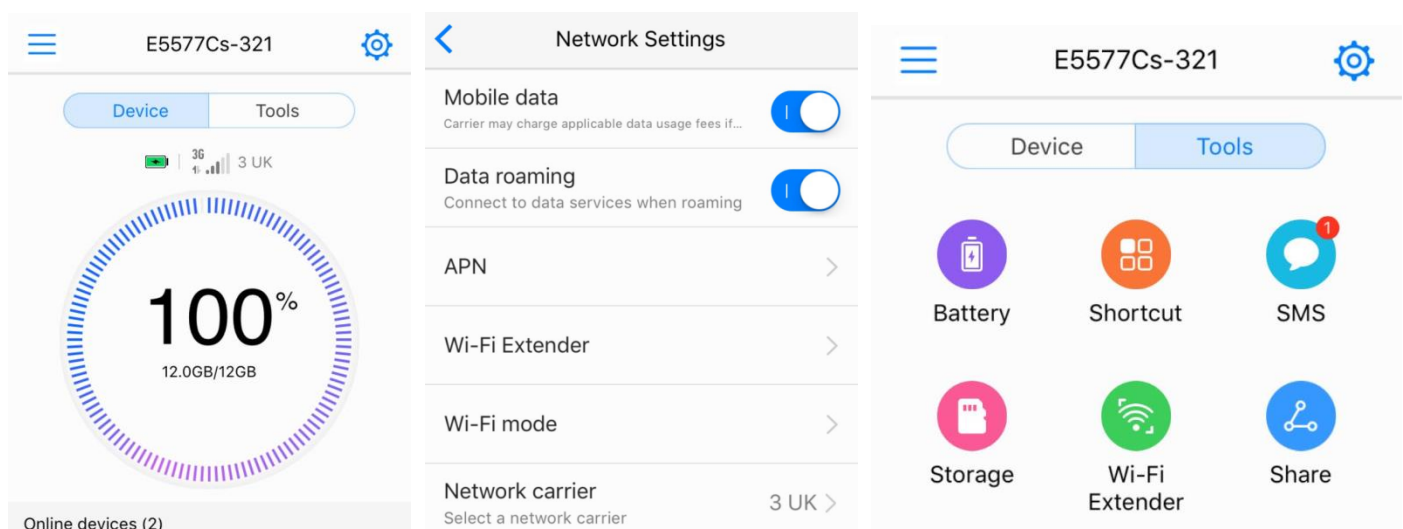

If you don't have a Smart Phone or Tablet, you can access the control panel located inside the device by typing in **http://192.168.8.1** into your address bar of your computer when connected to the MiFi device via WiFi.

You will be asked for a username and password, this is both **admin** for the username and **admin** for the password. You will be prompted to change the password; if you do only the password will be changed the username will remain as admin. Be sure to make a note of it afterwards as to recover a lost password you will have to reset the device.

There is a RESET button under the battery cover if you find that a change you have made prevents the device from working as intended. Press and hold this button while the MiFi is turned on until the Huawei log is displayed.

Additional Info / Troubleshooting

If you find your data is not lasting as long as you think it should, try and turn off automatic updates on your devices. Activities like streaming video can use a lot of data, up to 500MB per hour, so these should be avoided where possible. Consider downloading a free web browser called Opera which can greatly reduce the size of web pages by compressing them in the cloud. For more information see www.opera.com/turbo

Please contact us via www.motorhomewifi.com/support should you experience any issues using this device.

Free SIM Card: Three Reward SIM and Feel At Home Foreign Use

The packages you are able to buy using Three Reward card are:

200MB Valid 30 days FREE*	2GB Valid 30 days £15	5GB Valid 30 days £20	10GB Valid 30 days £25
---	---	---	--

Visit www.three.co.uk/freedata from a connection made through the SIM to get 200MB of free data every month.

These packages are valid for use in the UK and abroad. The SIM card can be used abroad for a maximum of 60 days

Adding Credit

Even though you can't make calls, your SIM will have a mobile phone number. There is a number printed on the back of your SIM Card pack – make a note of it as it can be handy using some of the topup and account services.

- 1.) You can add credit using a credit or debit card or e-topup voucher by visiting this page from any internet connection: **www.three.co.uk/web_top_up**
- 2.) **Using the connection provided by your MiFi and Three SIM** you can type in **www.three.co.uk** into your address bar and the Three web page should load even if there is no credit on the SIM card. Press **Login** (or My3) top right and you will access your My3 account. Here you can add credit and packages to your account.
- 3.) If you choose to register an account (this shouldn't be necessary if you use the option above) you can manage your account from any internet connection. Three will send you a text message to verify your SIM – please refer to page 2.
- 4.) You can buy a voucher from any supermarket (they are valid 90 days) and apply it by any of the methods above.

Converting Credit into a 'Package'

If you added credit via option 2 or 3 you may have been asked if you would like to convert to a package straight away in which case you are good to go. You manage your account by typing in www.three.co.uk via a connection made via the device (even though you may have no credit) and pressing Login / My3.

Limitations on Foreign Use on all Three SIM's (both PAYG SIM's supplied by us and Contract SIM's from Three)

Maximum of 2 months foreign use per year: "If you use your allowances exclusively in a Feel At Home destination for any 2 complete months in a rolling 12 month period, we may suspend international roaming". This (taken from Three's T&C's) is a bit ambiguous but we've taken this to mean a full 30 day period where the SIM is used only abroad (eg Spain) without being used either in the UK or a non-feel at home country network.

Our advice in order to manage this issue is simply to use the SIM card for 2 months and then dispose of it. We can supply pre-loaded SIM cards on our website or NIL credit SIM cards which can be stored and loaded with a package of your choice for 50p. **In addition, irrespective of your package, you can only use a maximum of 12GB per month.**